
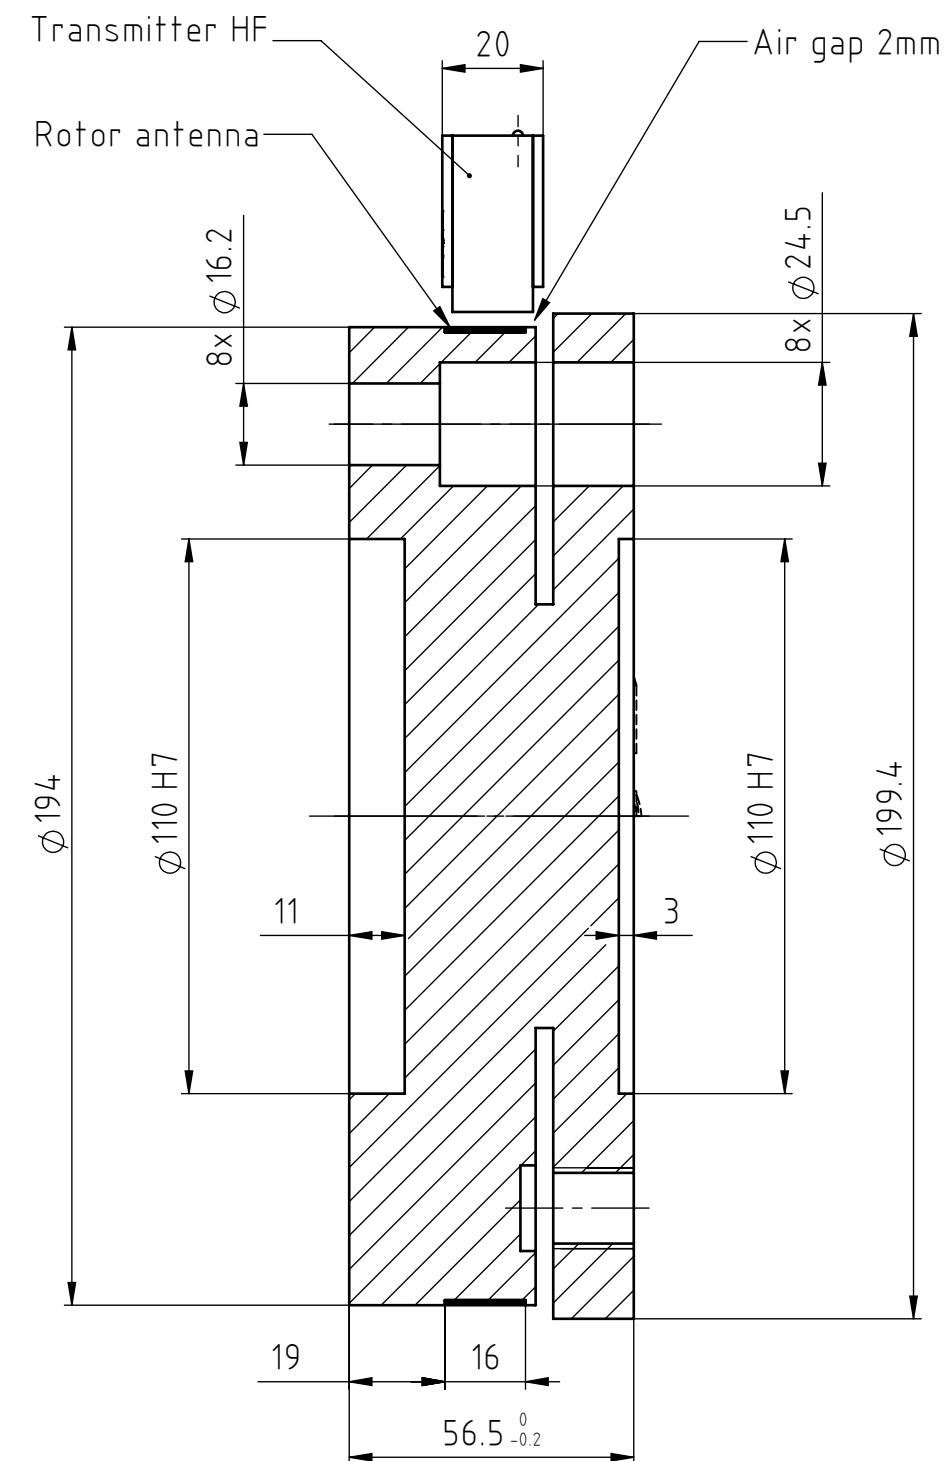


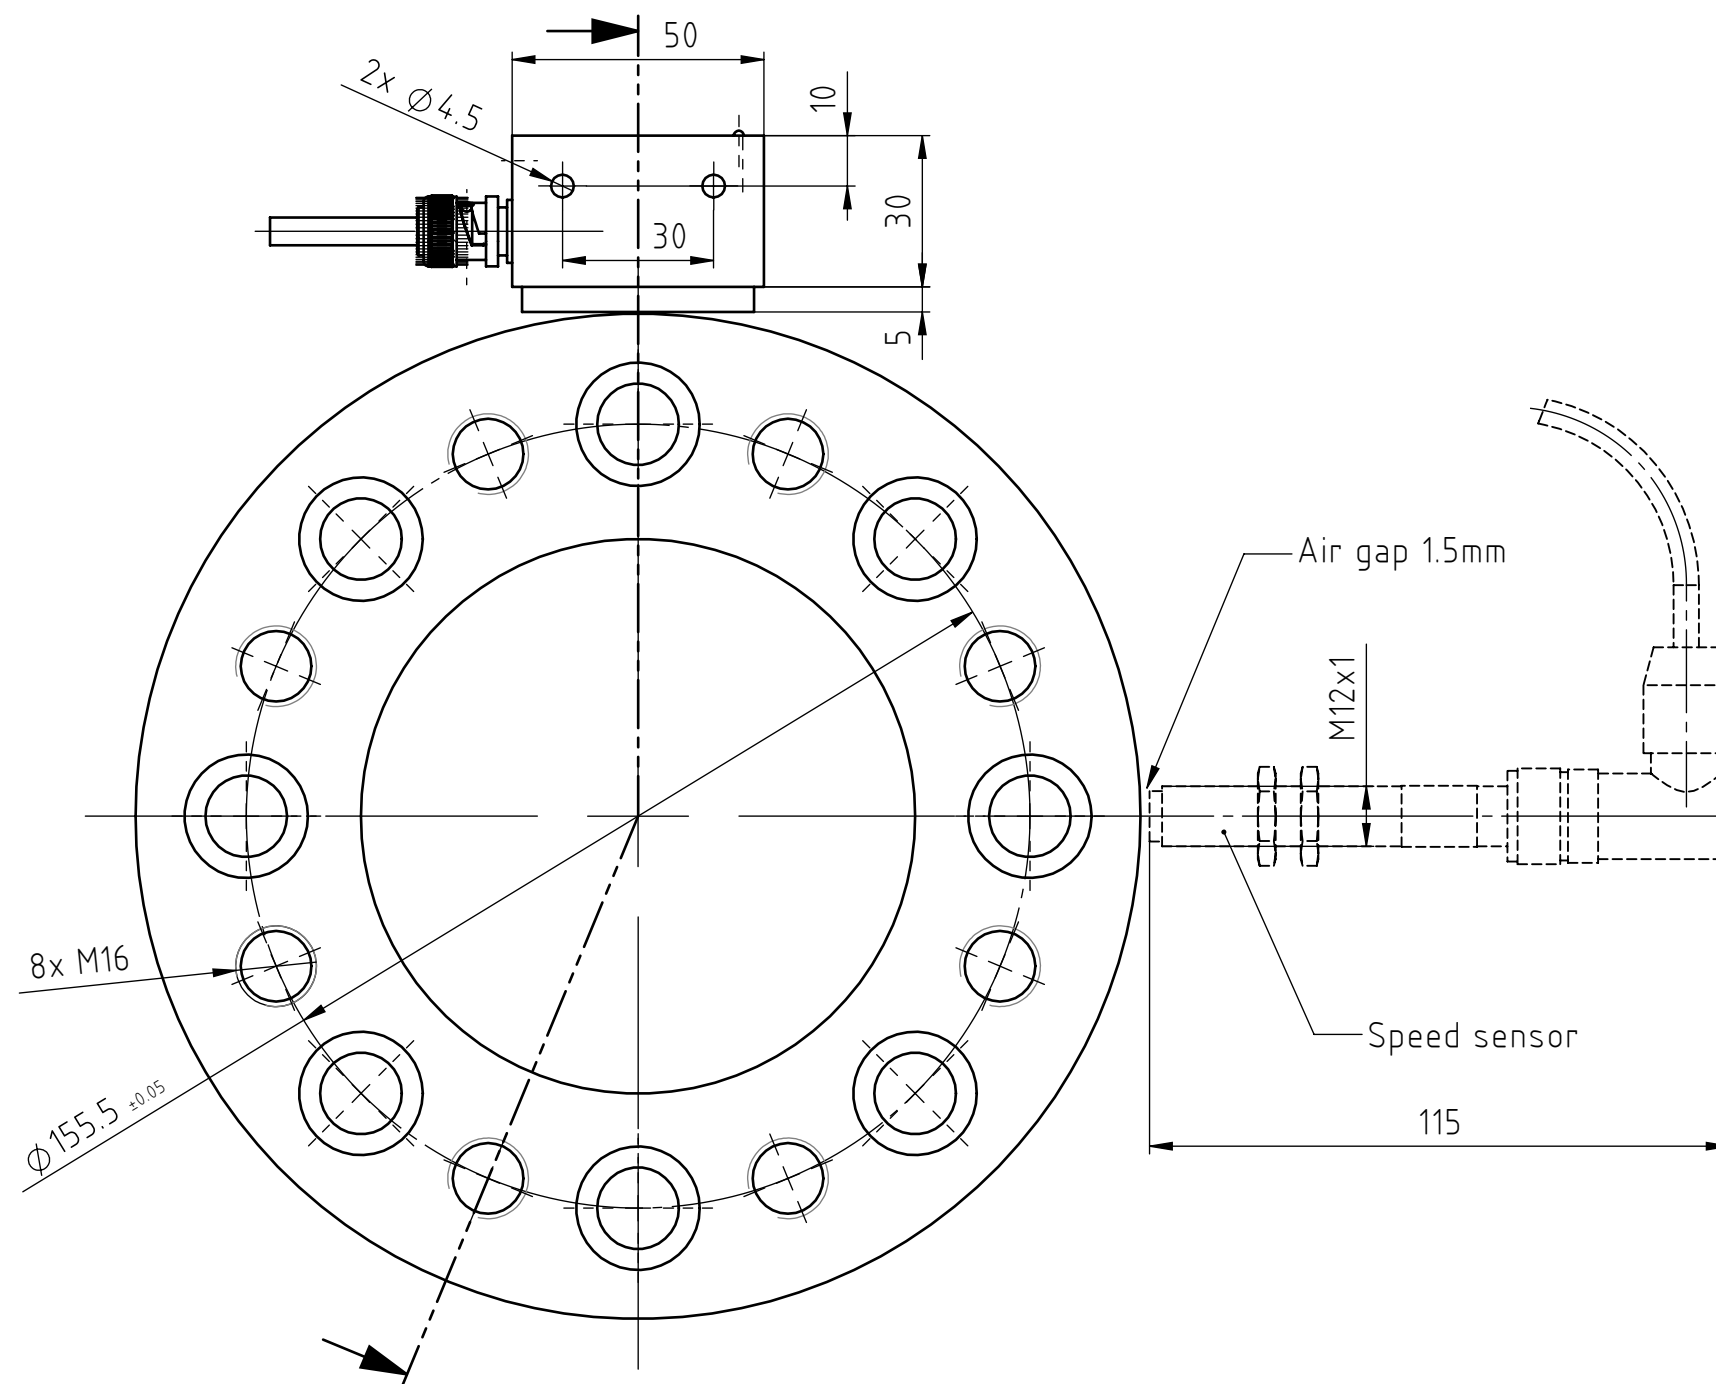

Error of linearity:	0.1%
Maximum torque:	150% of nominal
Maximum speed:	4'000 rpm
Sensitivity:	1mV/V
Strain gauge bridge:	700Ω
Rated temperature range:	+10°C to + 85°C
Storage temperature range:	-25°C to + 85°C
Protection class:	IP42

6					
5					
4					
3					
2					
1	14.04.08	08033	blot	blot	Changement de capteur de vitesse
Rev.	Date	PM	Drawn	Appr.	Repl. by :
					Repl. for:
Tolerances: ± mm to 50mm, ± mm over 50mm					
Material:					
Finish:					
TF217 (10kNm)					  MAGTROL SA SWITZERLAND
Torque Flange TF200					
Scale 1:1.5					Drawn 20.10.04 B.Lottenbach
Checked 20.10.04 B.Lottenbach					Approved 20.10.04 B.Lottenbach
DRAWING N°					425-217-000V012