
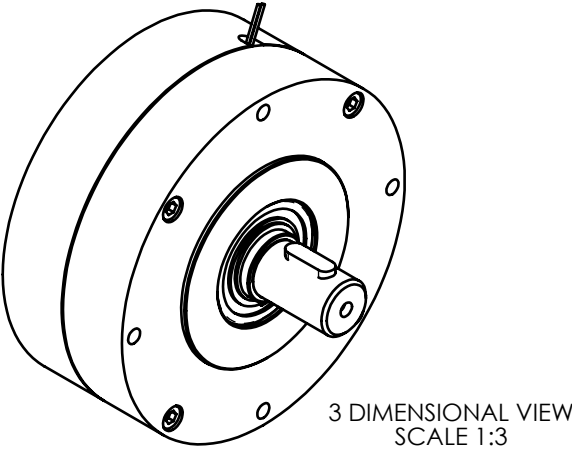
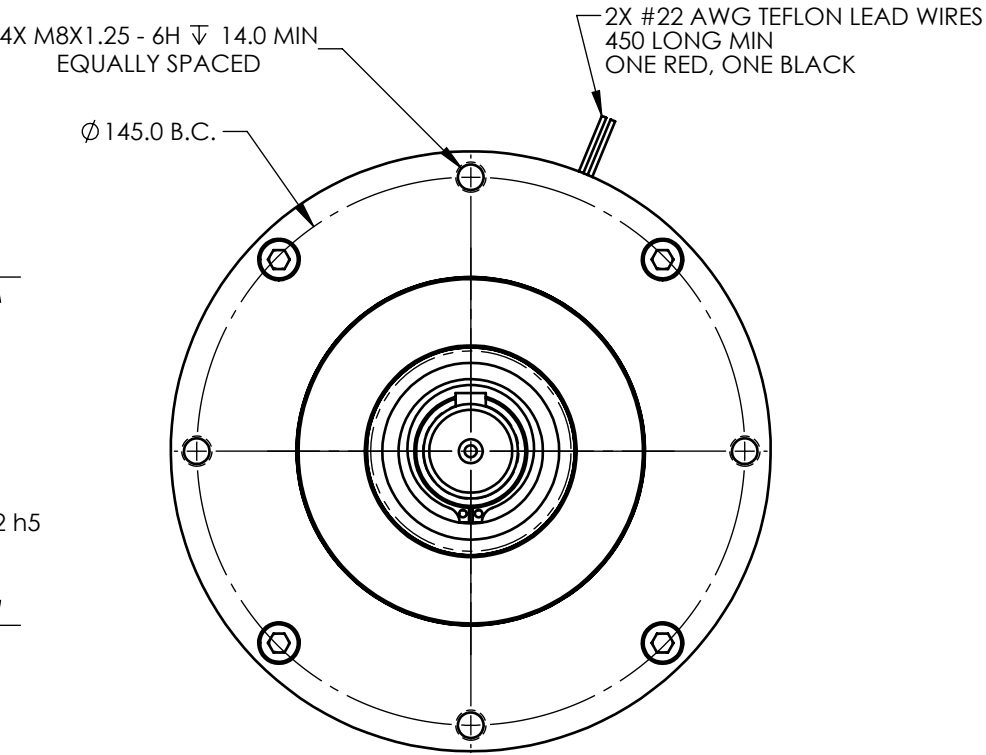
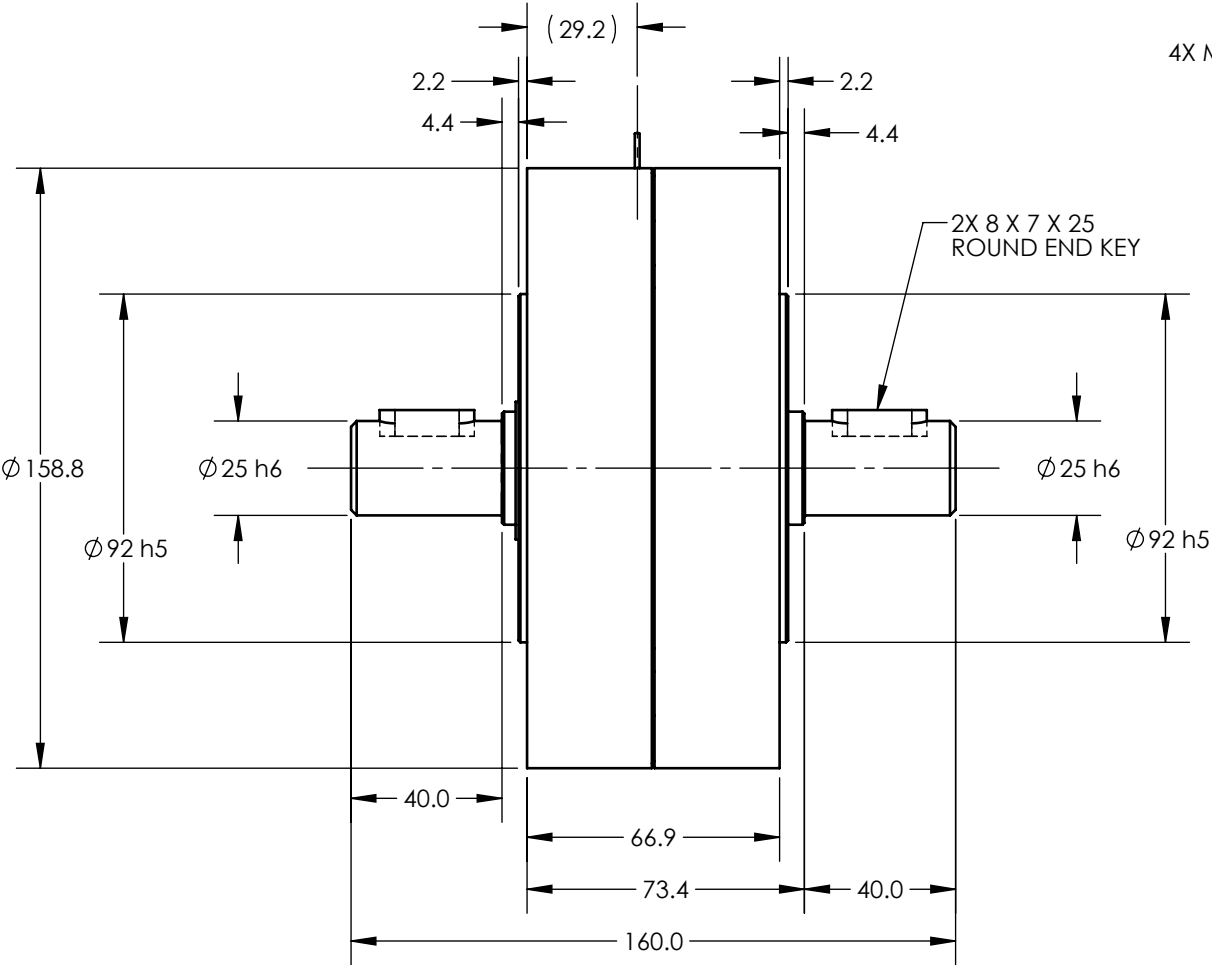
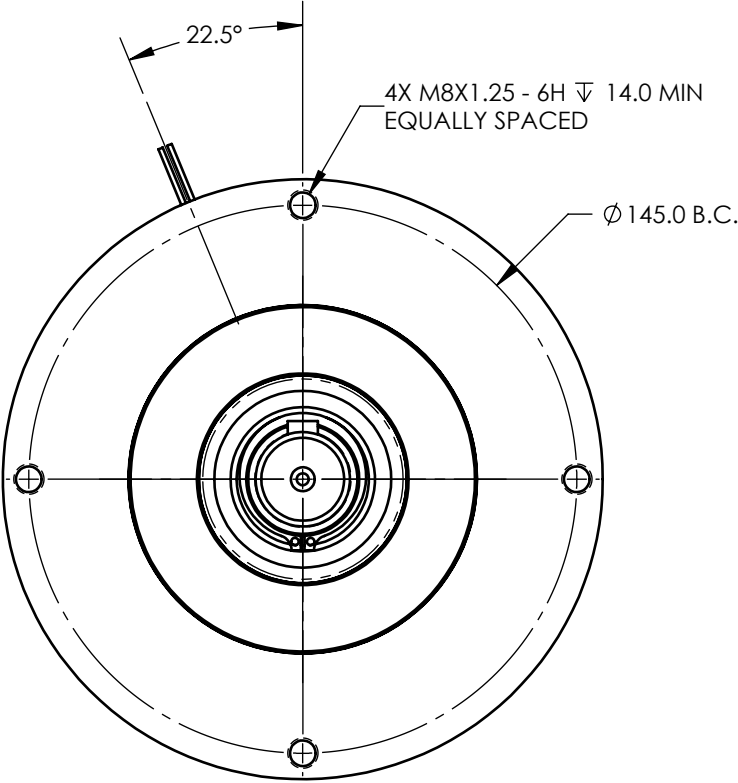


MODEL	STOCK CODE	MINIMUM TORQUE AT RATED CURRENT (Nm)	RATED CURRENT (mA)	RESISTANCE ±10% @ 25°C (ohms)	VOLTAGE (Vdc)	NOMINAL POWER (watts)	MAXIMUM SPEED (RPM)	MAXIMUM KINETIC POWER RATINGS (watts)	DE-ENERGIZED DRAG TORQUE @ 1/3 RATED SPEED (Nm)	EXTERNAL INERTIA (kg cm ²)	TORQUE TO INERTIA RATIO (rad/s ²)	MAXIMUM RADIAL LOAD (kg)	MAXIMUM AXIAL LOAD (kg)	WEIGHT (kg)
CPB-25B	006993	25.0	720	31	22.3	16.1	1,000	110	-	3.37	74,184	32	15	10

SOLID MODEL AVAILABLE



INSTALLATION DRAWING

MATERIAL: -	DESIGN	AJC	03/20/13	 MAGTROL INC. 70 GARDENVILLE PKWY, W. BUFFALO, NEW YORK 14224-1322	
	DRAWN	AJC	03/20/13		
FINISH: -	CHECKED	DTW	03/25/13	TITLE: CONVECTION POWDER BRAKE (DUAL SHAFT)	
THIRD ANGLE PROJECTION 	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS DIAMETERS CONCENTRIC: .08 TIR FACES PERPENDICULAR: .08 INTERPRETATION PER ASME Y14.5M-1994 REMOVE ALL BURRS AND BREAK SHARP EDGES 0.13/0.25 X 45° INSIDE CORNERS TO BE R 0.5 MAX TOLERANCES: .X ± .25 X ± .4 .XX ± .13 X° ± 1° SURFACE FINISH 3.2 µm MAX				
THIS DRAWING AND SPECIFICATION CONTAINS PROPRIETARY INFORMATION TO MAGTROL INC. ANY DISCLOSURE OR REPRODUCTION OF THIS DOCUMENT WITHOUT WRITTEN AUTHORIZATION FROM MAGTROL INC. IS EXPRESSLY PROHIBITED				DWG NO: CPB-25B	REV -
SIZE B		SCALE 1:2		SHEET #	