
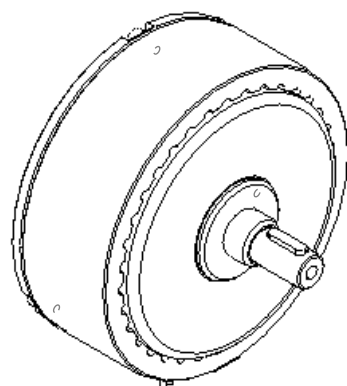
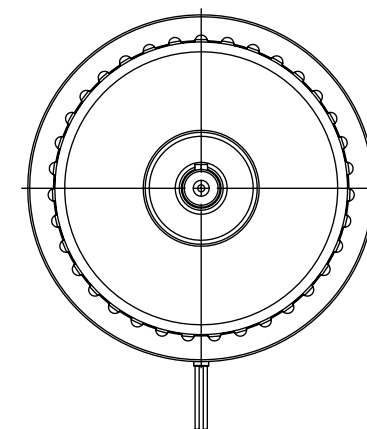
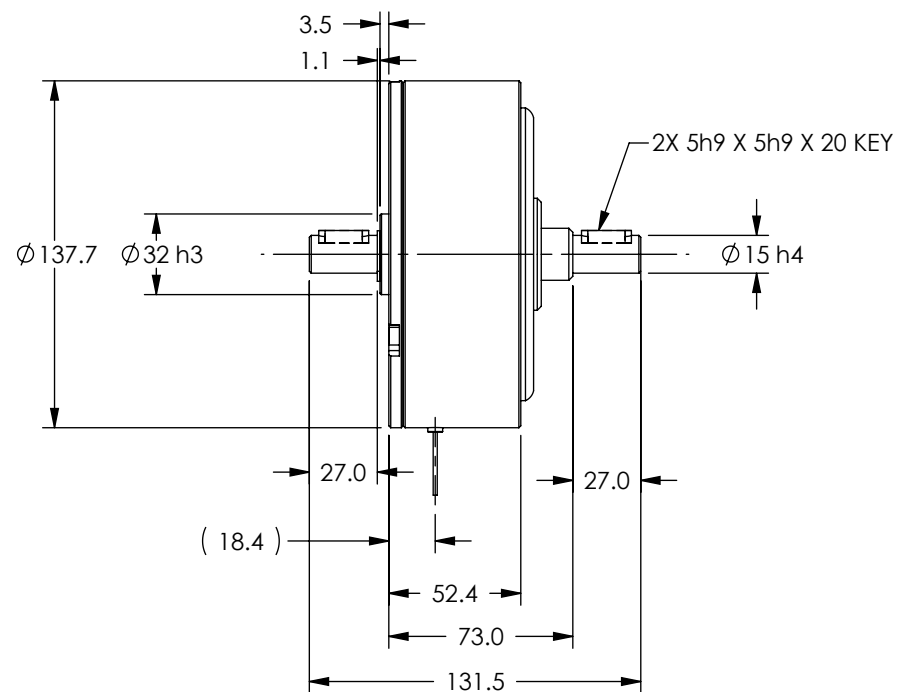



SOLID MODEL AVAILABLE

MODEL	COIL NUMBER	STOCK CODE	MINIMUM TORQUE AT RATED CURRENT (Nm)	RATED CURRENT (mA)	RESISTANCE ±10% @ 25°C (ohms)	VOLTAGE (Vdc)	NOMINAL POWER (watts)	MAXIMUM SPEED (RPM)	KINETIC POWER RATINGS		DE-ENERGIZED DRAG TORQUE @ 1000 RPM (Nm)	EXTERNAL INERTIA (kg cm <sup>2</sup> )	ANGULAR ACCELERATION (rad/s <sup>2</sup> )
									5 MINUTE (watts)	CONTINUOUS (watts)			
HB-450M	-1 (90 Vdc)	004664	3.2	116	805	93.6	10.9	8,000	670	160	1.51 X 10 <sup>-2</sup>	7.5	4,250
	-2 (24 Vdc)	004665	3.2	442	50	22.1	9.8						
	-3 (12 Vdc)	004666	3.2	703	19.5	13.7	9.6						

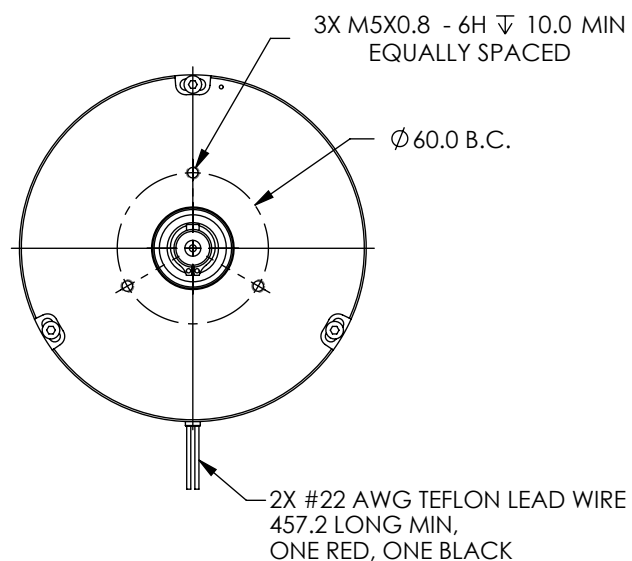

3 DIMENSIONAL VIEW  
SCALE 1 : 3

MATERIAL:	DESIGN	-	-	 <b>MAGTROL INC.</b> 70 GARDENVILLE PKWY, W. BUFFALO, NEW YORK 14224-1322
FINISH:	DRAWN	AJC	01/29/04	
THIRD ANGLE PROJECTION	CHECKED	DTW	01/29/04	TITLE <b>HB-450M METRIC HYSTERESIS BRAKE</b>
THIS DRAWING AND SPECIFICATION CONTAINS PROPRIETARY INFORMATION TO MAGTROL INC. ANY DISCLOSURE OR REPRODUCTION OF THIS DOCUMENT WITHOUT WRITTEN AUTHORIZATION FROM MAGTROL INC. IS EXPRESSLY PROHIBITED	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, DIAMETERS CONCENTRIC: .08 TIR, FACES PERPENDICULAR: .08 INTERPRETATION PER ASME Y14.5M-1994 REMOVE ALL BURRS AND BREAK SHARP EDGES .13/.25 X 45°, ALL INSIDE CORNERS TO BE .5 R MAX. TOLERANCES: X ± .4            .XX ± .13 .X ± .25        ANG. ± 1° SURFACE FINISH 3.2 μm MAX. U.O.S.			
	DWG. NO. <b>HB-450M</b>			REV <b>A</b>
SIZE <b>B</b>		SCALE <b>1:3</b>	SHEET # <b>2 OF 2</b>	